



PILOT OPTD. PR. RELIEF VALVE
MODULAR CONSTRUCTION
MPPR 06

ENGINEERING

1

Ref. No. P09252
Release 07/2004

Description






Pilot optd. pressure Relief Valve modular construction for vertical stacking assemblies.

For Cartridge Valve details refer P09605

Interface conforming to
ISO 4401 - AB - 03 - 04 - A
IS 10187
DIN 24340
Four models available.



Section

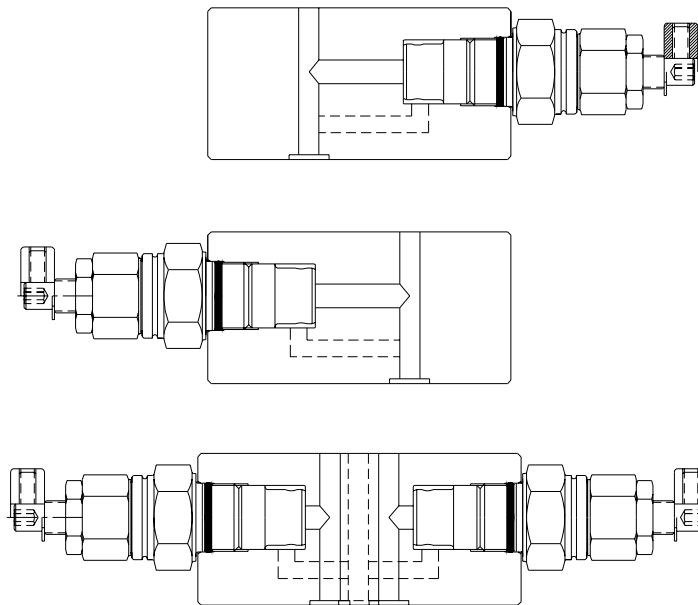

Hydraulic Symbol

Polyhydron Pvt. Ltd.
78-80, Machhe Industrial Estate,
Machhe, Belgaum - 590 014. INDIA.

Phone : +91-(0)831-2411001
Fax : +91-(0)831-2411002
E-mail : polyhydron@vsnl.com
Website : www.polyhydron.com



PILOT OPTD. PR. RELIEF VALVE
MODULAR CONSTRUCTION
MPPR 06


ENGINEERING

2


Ref. No. P09252

Unit dimension


Dimensions in mm

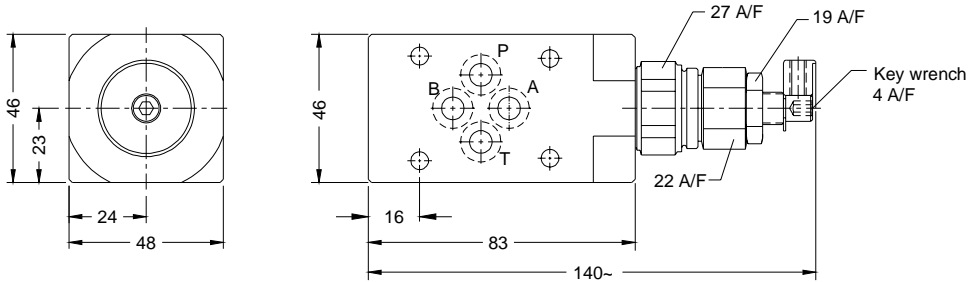


MPPR 06* - A

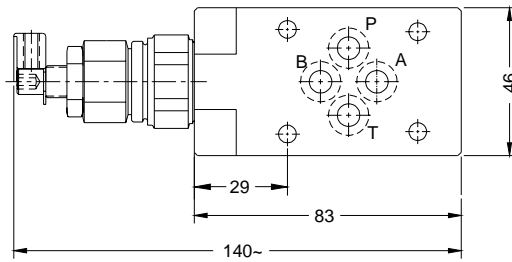


MPPR 06* - B

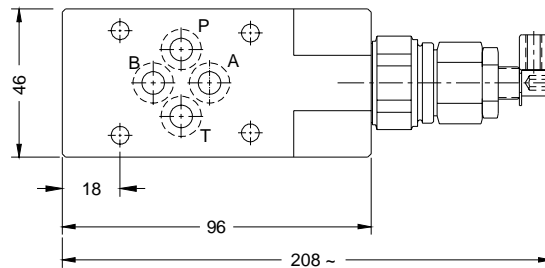

MPPR 06 P

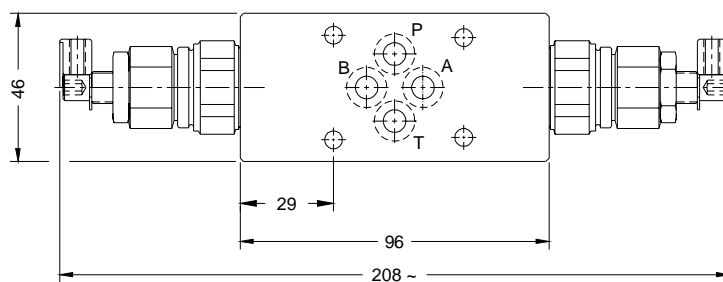

MPPR 06 AB

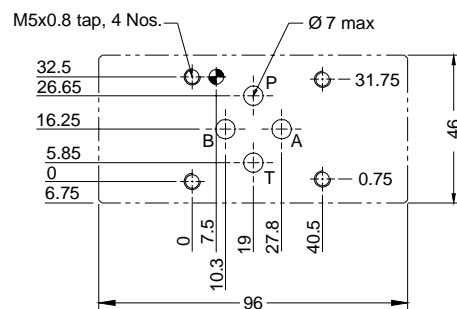

Interface



PILOT OPTD. PR. RELIEF VALVE
MODULAR CONSTRUCTION
MPPR 06

ENGINEERING


3

Ref. No. P09252

Technical specification

Construction	Modular(stackable type)
Mounting	Modular type, conforming to - IS 10187 ISO 4401 - AB - 03 - 4 - A DIN 24340
Mounting position	Optional
Direction of flow	As indicated by the hydraulic symbols.
Operating pressure	315 bar for all ports.
Cracking pressure	Refer PPR06 datasheet
Viscosity range	10 cSt to 380 cSt.
Fluid temperature range	-10 °C to +80 °C
Nominal flow handling capacity	30 lpm

Ordering code

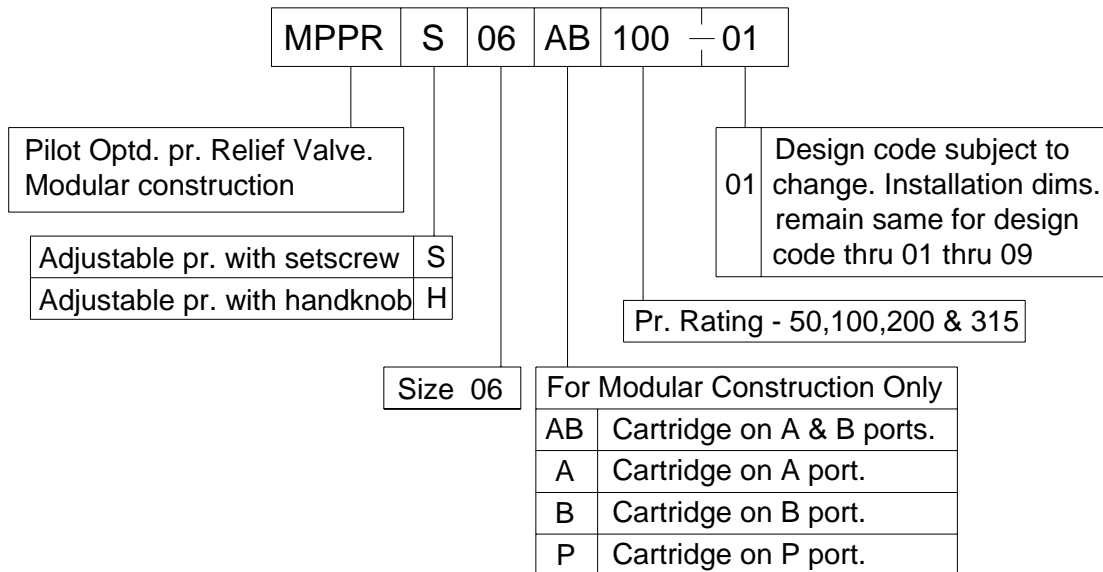

All rights reserved.
Subject to revision.